


PRO SPOT LIGHT

RS1151 series

Description

- Color temperature options: 2700K, 3000K, 4000K, 6500K, pc Amber, RGB/ RGBW
- SDCM (Mac Adam Ellipse): ≤ 3
- Color rendering index: Single colors ≥ 80 , RGBW ≥ 50
- Up to 50,000 hours L80 lamp life with LM80 tested LED chip packages
- Beam pattern options: 2.5°, 6°, 12°, 15°, 20°, 30°, 40°, 60°, 10x70°, 5x20°... (depending on LED module)
- Luminous efficiency: 35 lm/W – 90 lm/W (depending on LED and CCT)
- Protect eyes and reduced flicker percentage
- Optional comfort Pro, color, light effect filters and honeycomb anti-glare louvre
- Body: Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction. *Optional - marine grade sea salt corrosion resistant*
- Ambient Humidity: 10% ~ 90%
- Ambient Temperature: -20°C ~ 50°C
- IP66/ IK08
- Accessories:

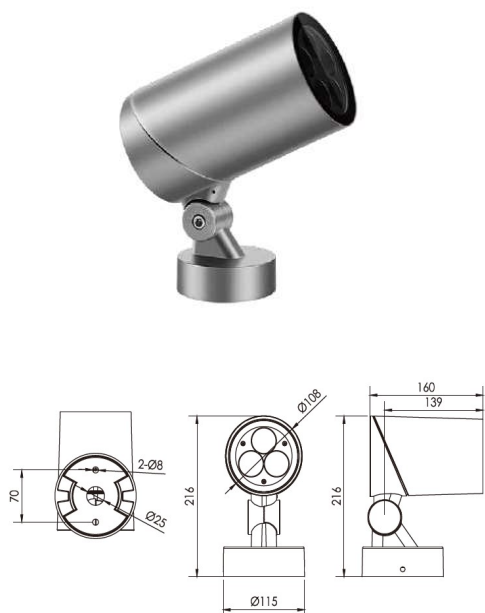

Specification


Model (F-Kit)	RS1151FI-3	RS1151FE-3	RS1151FD-3	RS1151FG-1	RS1151FF-3
Power	30W	15W	12W	15/30W	12W
Input Voltage	AC 100 – 264V	AC 100 – 264V	AC 100 – 264V	AC 100 – 264V	AC 100 – 264V
Color	2700K/3000K/4000K	2700K/3000K/4000K	2700K/3000K/4000K	RGB/ RGBW	RGB/ RGBW
Beam Angle	6°, 12°, 20°, 30°, 40°, 60°, 10X70°, 5X20°			5°, 20°	15°, 20°, 30°, 15x60°
Control Mode	On-Off/O-10V/DALI	On-Off/O-10V/DALI	On-Off/O-10V/DALI	DMX512/RDM	DMX512/RDM
In Series (max)	44pcs	88pcs	110pcs	9/4pcs	12pcs

➤ To get an order code: RS1151FI-5-27-30 (Model: RS1151FI-5; 27: CCT 2700K; 30: Beam angle 30°)


Installation guide




S-Kit




F-Kit Available Dia of Pole (67-325mm)

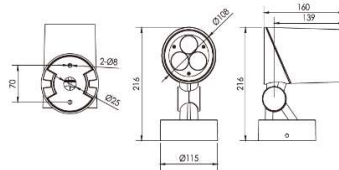


U-Kit Available Dia of Pole (67-325mm)

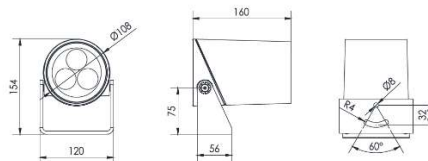


M-Kit Available Dia of Pole (67-325mm)

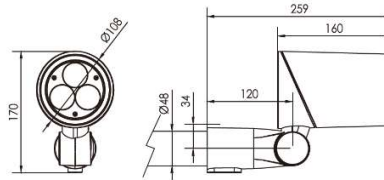

Z-Kit Available Dia of Pole (67-325mm)



L-Kit Available Dia of Pole (67-325mm)



H-Kit Available Dia of Pole (168-268mm)

