


PRO IN-GROUND LIGHT

RS2139 series

Description

- Color temperature options: 2700K, 3000K, 4000K, 6500K, pc Amber, RGB/ RGBW
- SDCM (Mac Adam Ellipse): ≤ 3
- Color rendering index: Single colors ≥ 80 , RGBW ≥ 50
- Up to 50,000 hours L80 lamp life with LM80 tested LED chip packages
- Beam pattern options: 2.5°, 6°, 12°, 15°, 20°, 30°, 40°, 60°, 10x70°, 5x20°... (depending on LED module)
- Luminous efficiency: 35 lm/W – 90 lm/W (depending on LED and CCT)
- Protect eyes and reduced flicker percentage
- Body: The light body uses the design of increasing heat dissipation space, the buried barrel adopts aluminium alloy compression moulding forming. Surface with anodizing treatment has the stronger structure and anti-corrosion capability, that its thermal conductivity is 200 times higher than the normal project plastic's. Stainless steel faceplate, high pressure die casting light body, surface with electrostatic plastic coating. *Optional - marine grade sea salt corrosion resistant*
- Ambient Humidity/ Temperature: 10% ~ 90%/ -20°C ~ 50°C
- IP67/ IK10
- Accessories:

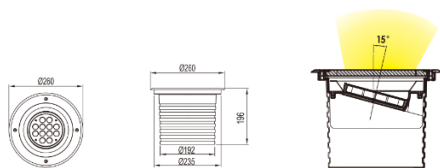

"can be adjusted direction light"



Specification

Model	RS2139CC-12	RS2139CA-12
Power	32W	14W
Input Voltage	AC 100 – 240V/DC 24V	
Color	2700K/3000K/4000K/RGB/RGBW	
Beam Angle	8°, 12.5°, 20°, 30°, 45°, 60°, 15x30°, 10x60°	
Control Mode	On-Off/O-10V/DALI/ DMX512	

➤ **To get an order code:** RS2139CC-12-27-30 (Model: RS2139CC-12; 27: CCT 2700K; 30: Beam angle 30°)