




UNDERWATER LIGHT

RL.U8005 series



Description

- Color temperature options: 2700K, 3000K, 4000K, 6500K, pc Amber, RGB/ RGBW
- SDCM (Mac Adam Ellipse): ≤ 3
- Color rendering index: Single colors ≥ 80 , RGBW ≥ 50
- Up to 50,000 hours L80 lamp life with LM80 tested LED chip packages
- Beam pattern options: 15°, 25°, 30°, 45°, 60° (depending on LED module)
- Luminous efficiency: 35 lm/W – 90 lm/W (depending on LED and CCT)
- Protect eyes and reduced flicker percentage
- Body: Stainless steel for full body and faceplate, high pressure die casting light body, surface with electrostatic plastic coating.
- IP68/ IK10
- Water stopper accessories
- Must be install under water when turn on the light

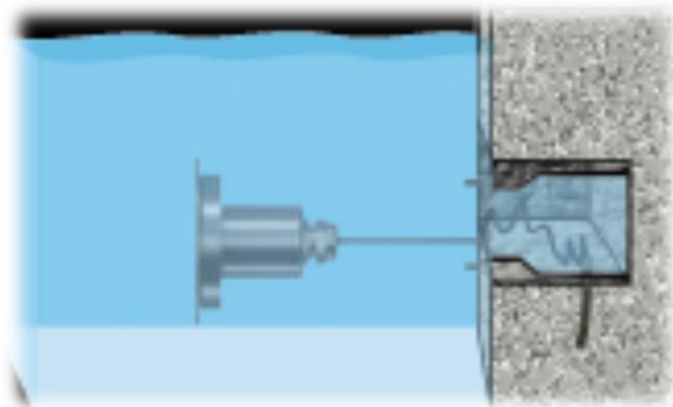

Specification

Model	RL.U8005.xx.xx
Power	2W
Input Voltage	12V/ 24V DC
Color	2700K/3000K/4000K/RGB/RGBW
Beam Angle	15°, 25°, 30°, 45°, 60°
Control Mode	On-Off/O-10V/DALI/ DMX512
Dimension	DxH = 68x83mm

➤ To get an order code: RL.U8005.27.30 (Model: RL.U8005; 27: CCT 2700K; 30: Beam angle 30°)

OUTDOOR SERIES

www.rofelighting.com